

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 February 2002 (14.02.2002)

PCT

(10) International Publication Number  
WO 02/11897 A1

(51) International Patent Classification<sup>7</sup>: B05C 11/02.  
B05B 13/00. B05D 5/06. 3/12

(21) International Application Number: PCT/EP01/09106

(22) International Filing Date: 7 August 2001 (07.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
MI2000A001857 9 August 2000 (09.08.2000) IT

(71) Applicant (for all designated States except US): MIDA  
S.R.L. [IT/IT]; S.S. 16KM. 978+940, I-73020 Melpignano  
(IT).

(72) Inventor: and

(75) Inventor/Applicant (for US only): LORONI, Massimil-  
iano [IT/IT]; Via Serralta, 3, I-60048 Serra San Quirico  
(IT).

(74) Agent: PIOVESANA, Paolo; Corso del Popolo, 70,  
I-30172 Venezia Mestre (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,  
ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: PLANT FOR DECORATING METAL SURFACE

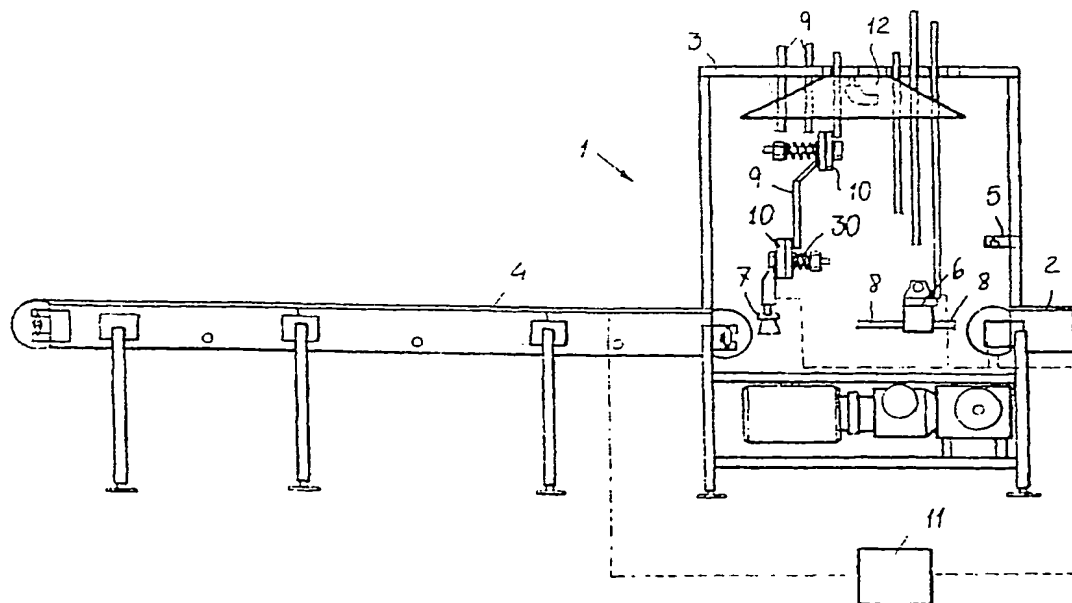

(57) Abstract: A plant (1) for decorating metal surfaces, characterised by comprising first means (6) for depositing a coating mate-  
rial on a surface to be decorated, and second means (7) for spreading said coating material to form a predetermined decoration, said  
first means (6) and said second (7) being arranged to operate in succession.

WO 02/11897 A1

## PLANT FOR DECORATING METAL SURFACE.

This invention relates to a plant for decorating metal surface.

In particular, the invention relates to a plant which enables liquid  
5 coatings and/or coatings in the form of powder suspended in a liquid vehicle  
to be applied to aluminium profile bars for door or window structures, to give  
them an appearance similar to wood.

Currently, the methods mostly used for treating the metal surfaces of  
profile bars are:

- 10 - photofilm application,
- the application of a PVC facing reproducing wood veining,
- silk-screen printing,
- powder-on-powder application with brushing treatment,
- the application of coating materials suspended in a liquid vehicle on a  
15 powder base.

To apply a "wooden" decoration by known methods, the procedure is  
as follows.

In photofilm application, a first coating layer forming the background  
colour is firstly applied to the profile bar by means of powder or liquid. A film  
20 reproducing the wood veining is then applied to the background.

This method gives a result which is of unsatisfactory appearance  
because of the excessive uniformity of the decoration and the consequent  
poor similarity with natural wood. Applying a PVC facing consists essentially  
of forming, by traditional methods, a PVC film reproducing wood veining.

25 The film is then glued to metal profile bar.

This method has also proved unsatisfactory, as the resultant appearance is not similar to natural wood.

With silk-screen printing, a first coating layer forming the background colour is firstly applied to the profile bar. After a pre-polymerization heat treatment, a layer of powders reproducing wood veining is then applied via masking covers. The coating cycle is completed by a polymerization heat treatment.

Powder-on-powder application with brushing treatment consists of a mechanical action on a second powder layer, enabling the desired decoration to be obtained. After a pre-polymerization heat treatment, a second powder layer is deposited on the background and finished by brushing. The coating cycle is then completed by polymerization heat treatment.

This method results in an unsatisfactory appearance, as it produces continuous uniform lines on the profile bar surface, caused by the brushing.

The application of coating materials suspended in a liquid vehicle on a powder base requires four steps.

The first step is to apply onto the surface to be decorated, previously subjected to chemical conversion treatment, a layer of powder coating material of colour corresponding to the desired background for the decoration to be obtained.

The second step is to heat the treated surface to a temperature lower than the melting point of the powder coating material, but sufficient to fix it to the metal surface.

The third step is to apply to the prepared surface, by manual application, a coating material suspended in a liquid vehicle to visualize wood veining.

The fourth step is to bake the profile bar at a temperature of about 180°C for 20 minutes.

This latter method is more able than the others to give the profile bar a variable outer appearance, which is hence very similar to wood.

5           However, the method is very costly.

In particular the third coating application step, which is exclusively manual, involves very high cost and limited productivity.

Moreover the result depends on the expertise of the operator, and hence the quality of the finished piece is variable in that the surface of the  
10   decorated profile bar sometimes presents surface defects, due to the considerable variability of manually produced veining.

In the working environment the risks to the health of the plant operators are very high; in this respect, only solvent-containing products are used, these being notoriously damaging to human health.

15           These risks are considerably accentuated by the fact that the coating is applied manually, as stated.

The technical aim of the present invention is therefore to provide a plant for decorating metal surfaces which eliminates the stated drawbacks.

Within the scope of this technical aim, one object of the invention is to  
20   provide a plant which is economical while at the same time enabling the work to be carried out with very high productivity.

Another object of the invention is to provide a plant enabling profile bars to be decorated with a very high quality which is constant with time. In particular, those profile bars treated by the plant of the invention present a  
25   finished surface substantially free of surface defects.

A further object of the invention is to provide a plant which is very safe for operator health.

A further object of the invention is to provide a plant for decorating metal surfaces which is substantially simple and reliable.

5        These and further objects are attained according to the invention by a plant for decorating metal surfaces in accordance with claim 1.

Further characteristics of the present invention are defined in the subsequent claims.

Advantageously, the plant of the invention is totally automated, with  
10        the result that its working does not include steps which have to be carried out manually, other than the loading and unloading of the profile bars under treatment, and even this can be automated.

Further characteristics and advantages of a plant of the invention for decorating metal surfaces will be more apparent from the ensuing description  
15        with reference to the single accompanying drawing, which represents a schematic partial side elevation of a plant of the present invention.

The sole figure shows a plant for decorating metal surfaces indicated overall by the reference numeral 1.

The plant 1 comprises a first conveyor belt 2 which feeds the articles  
20        to be decorated, such as profile bars, plates and metal articles in general, into a coating cabin 3, and a second conveyor belt 4 which carries the decorated articles out of the cabin 3.

At one end of the conveyor 2, the plant 1 presents a photoelectric cell  
5, arranged to sense the presence of the articles to be decorated, to operate  
25        one or more sprayers 6 and brushes or miscellaneous implements 7 housed in the cabin 3.

In the example, the plant 1 presents three sprayers 6 and three brushes or miscellaneous implements 7 (only one sprayer and one brush are shown), which operate on an upwardly facing surface of a profile bar under treatment and on two lateral surfaces respectively.

5            Preferably the brushes or miscellaneous implements 7 are positioned immediately downstream of the sprayers 6.

The sprayers 6 are connected by conduits 8 to a pressurized cup (not shown) of one or more litres capacity closed hermetically by a lid. This cup contains the coating material of product for the decoration.

10           The conduits 8 are closed at the sprayers 6 by pistons (not shown) connected to a pneumatic circuit.

The pneumatic circuit is provided with a solenoid valve connected, for its operation, to the photoelectric cell 5.

15           The plant 1 is also provided with an atomization air circuit, which opens at the nozzles of the sprayers 6.

This atomization air emerges through lateral holes in the nozzles and atomizes the coating material to create a fan of regular shape.

The brushes or miscellaneous implements 7 are fixed to supports or arms 9 provided with articulated joints 10.

20           In the present embodiment, the articulated joints 10 comprise friction discs 30, which ensure controlled movement of the arms 9.

In this manner the arms 9 can be adjusted before filling the plant 1, to adapt it to the work to be carried out, for example by varying the pressure or the angle of the brushes or miscellaneous implements 7 to the profile bars.

The plant is also provided with an electronic data processor 11 which is connected to the loading conveyor 2, to the discharge conveyor 4 and to the photoelectric cell 5.

5 The supports 9 are also movable automatically, for which they are connected to the electronic processor 11.

In practice the brushes or miscellaneous implements 7 can automatically assume the most suitable position for each type of profile and/or can oscillate transversely to improve the naturalness of the finished product.

10 A suction unit 12 is also housed in the coating cabin 3 to maintain the cabin interior under slight vacuum and ensure that the sprayed coating material does not flow to the outside, but is instead conveyed to a filter unit.

The plant for decorating metal surfaces of the invention operates substantially as follows.

15 The profile bars to be treated are previously subjected to conversion treatment, after which a layer of coating material in powder form, for example of epoxy or polyester type, is deposited on their surface.

The profile bars are then heated to a temperature of 90-100°C to fix the coating to their surface.

20 The profile bars treated in this manner are deposited on the conveyor 2, which conveys them into the cabin 3 by making them pass through the photoelectric cell 5.

These profile bars are of very large length (about 6.5 metres) and are therefore conveyed resting on one or on both the conveyors 2 and 4, but are not supported between the conveyors 2, 3.

The photoelectric cell 5 informs the processor 11 of the presence of the profile bars to be treated and at the same time operates the solenoid valve, which opens the pneumatic circuit.

In its turn, the pneumatic circuit displaces the pipe closure piston and  
5 commences the spraying of coating by the sprayers 6.

The sprayers 6 deliver either coating material in diluted powder form or liquid coating material.

At the same time the atomizing air flow is also activated, its pressure being adjusted on the basis of the coating material viscosity.

10 The quantity of coating material deposited on the profile bars depends both on the operating air pressure and on the speed of the conveyors 2, 4, which also influences the veining finish.

These parameters can be adjusted to optimize the decoration.

The profile bars then pass through the region comprising the brushes  
15 or miscellaneous implements 7, which are positioned and moved in a suitable manner to form the wood veining.

The brushes or miscellaneous implements 7 are arranged to spread the coating material to form veining of wood type.

The sprayers 6 and the brushes or miscellaneous implements 7 are  
20 arranged in succession and, for example, are mutually aligned; in addition, their position and their pressure on the coating can be adjusted by means of the articulated joints 10 of the arms 9.

The brushes or miscellaneous implements 7 can also oscillate or rotate relative to the profile bars, to produce veining of the required  
25 characteristics on the profile bars.



The electronic processor 11 controls all the devices of the plant 1, which is therefore completely automated and programmable.

In this respect, the plant requires the intervention of operators only for the initial setting and for depositing the profile bars on the conveyor 2 for  
5 treatment, or for removing them from the conveyor 4.

In a different embodiment the plant of the invention is not provided with the electronic processor 11.

In this embodiment all the commands and adjustments effected by the electronic processor 11 are made manually.

10 In addition, the distance between the conveyor belts 2, 4 can be varied to adapt it to the various type of product to be treated or to profile bars of different lengths.

A plant similar to that described can also be used for coating profile bars or articles in a vertical position.

15 In that embodiment the sprayers 6, the brushes or miscellaneous implements 7 and the suction fans 12 are mounted on a carriage, which moves vertically within the coating cabin 3 with suitable speed relative to the advancement of the profile bars.

The plant of the invention also enables decorations to be produced  
20 which simulate various natural products provided with veining, for example marble, hard stone, etc.

It has been found in practice that the plant for decorating metal surfaces of the invention is particularly advantageous because it enables work of very high quality to be carried out, which is not only constant with time but  
25 is very economical compared with traditional process.

The plant also considerably increases the safety of the process operators and achieves a very high production rate.

The plant for decorating metal surfaces conceived in this manner is susceptible to numerous modifications and variants, all falling within the scope  
5 of the invention; moreover all details can be replaced by technically equivalent elements.

In practice, the materials used and the dimensions can be varied according to technical requirements.

10

15

20


25

## C L A I M S

1. A plant (1) for decorating metal surfaces, characterised by comprising first means (6) for depositing a coating material on a surface to be decorated, and second means (7) for spreading said coating material to form a predetermined  
5 decoration, said first means (6) and said second means (7) being arranged to operate in succession.
2. A plant (1) as claimed in claim 1, characterised in that said first means (6) and second means (7) are housed in a coating cabin (3).
3. A plant (1) as claimed in one or more of the preceding claims,  
10 characterised in that said coating cabin (3) is associated with a suction unit (12) which maintains its interior under slight vacuum and ensures that said sprayed coating material is conveyed to a filter unit.
4. A plant (1) as claimed in one or more of the preceding claims, characterised by comprising third means (5) arranged to sense the presence  
15 of profile bars to be decorated, in order to operate said first means (6) and/or said second means (7).
5. A plant (1) as claimed in one or more of the preceding claims, characterised in that said first means (6) and/or said second means (7) are connected to an electronic processor (11).
- 20 6. A plant (1) as claimed in one or more of the preceding claims, characterised in that said first means (6) comprise at least one sprayer connected to a coating material container.
7. A plant (1) as claimed in one or more of the preceding claims, characterised in that said second means (7) comprise at least one brush or  
25 miscellaneous implement, arranged to form veining of wood type on said articles.

8. A plant (1) as claimed in one or more of the preceding claims, characterised in that said brushes or miscellaneous implements (7) are supported by supports provided with articulated joints (10), which enable their position to be optimized.
- 5 9. A plant (1) as claimed in one or more of the preceding claims, characterised in that said third means (5) comprise at least one photoelectric cell.
10. A plant (1) as claimed in one or more of the preceding claims, characterised in that said coating cabin (3) presents at least a first conveyor (2) for feeding into its interior said profile bars to be decorated, and a second conveyor (4) for removing said decorated profile bars from its interior.
11. A plant (1) as claimed in one or more of the preceding claims, characterised in that the distance between said first conveyor (2) and said second conveyor (4) can be varied, to adapt it to various types of product to  
15 be treated or to profile bars of different lengths.
12. A plant (1) as claimed in one or more of the preceding claims, characterised in that the speed of said first and second conveyor (2, 4) and/or the quantity of coating material delivered can be adjusted.

1/1

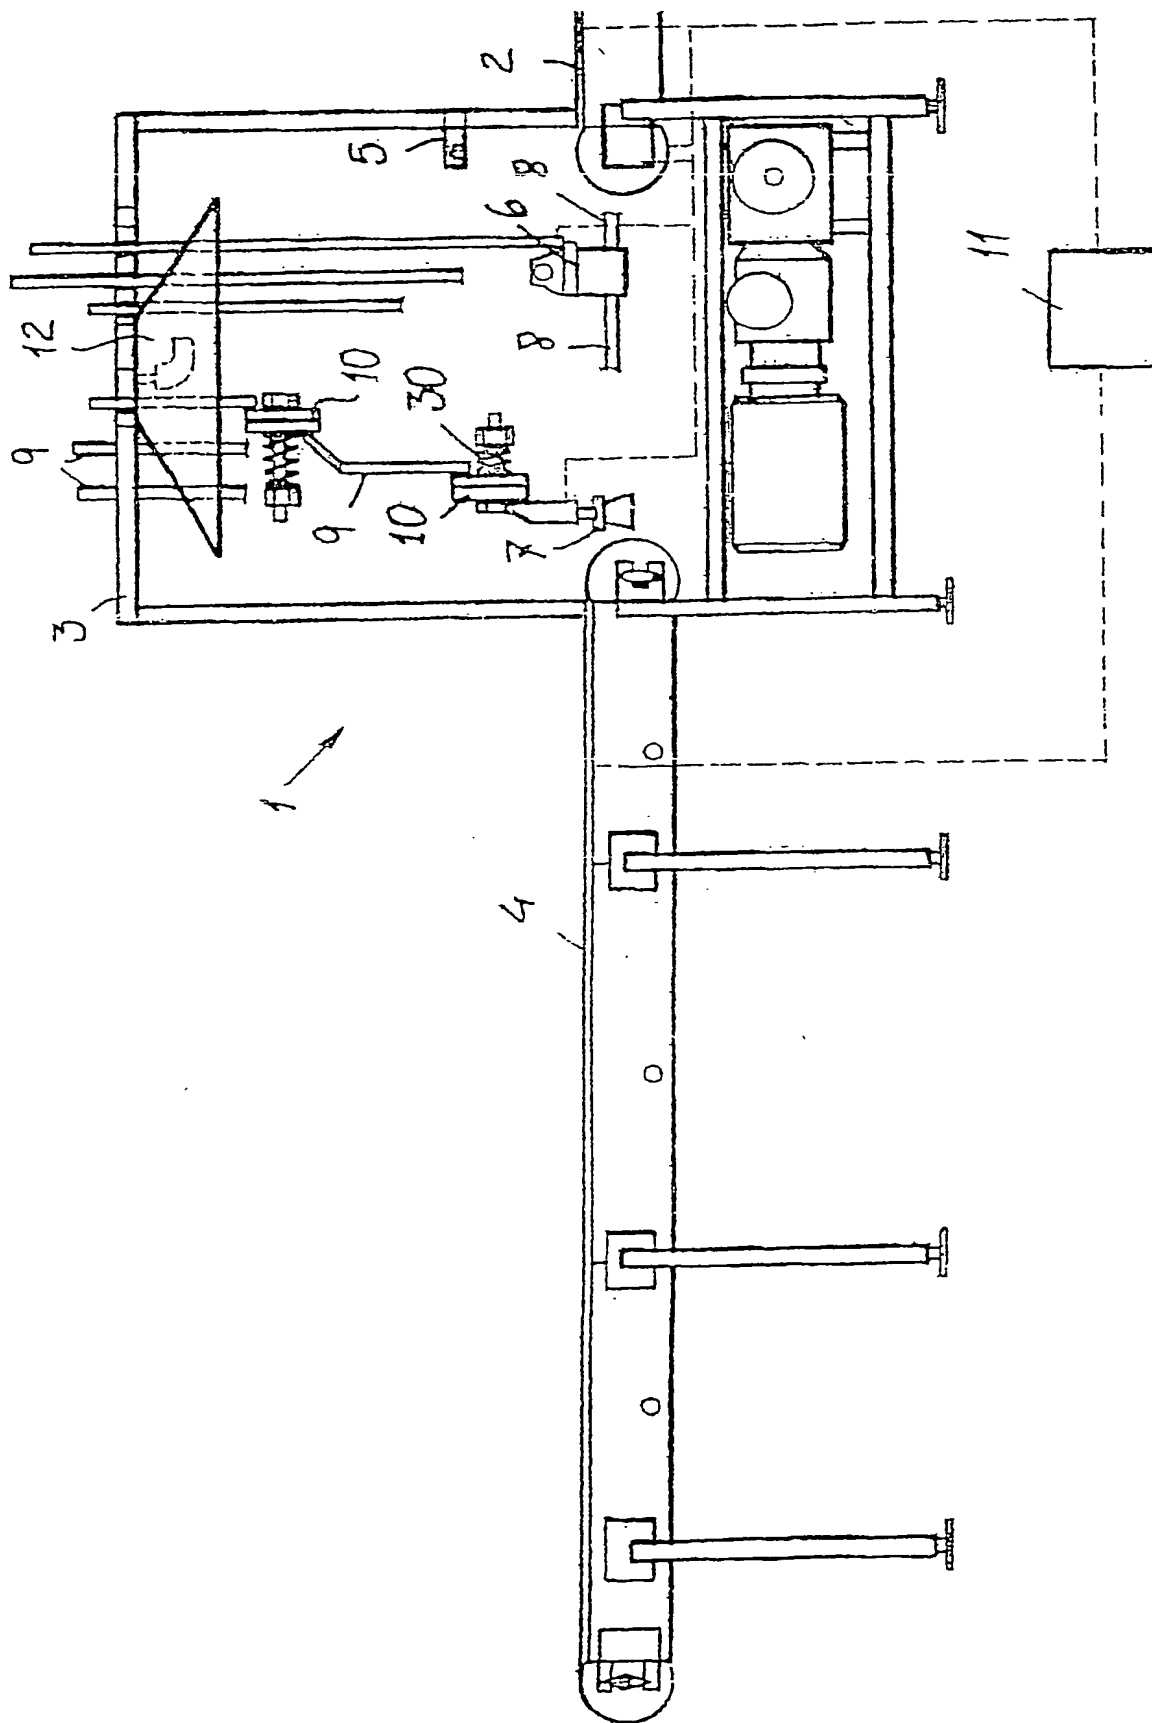

## INTERNATIONAL SEARCH REPORT

Int onal Application No

PCT/EP 01/09106

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B05C11/02 B05B13/00 B05D5/06 B05D3/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B05C B05B B05D B44F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 044 442 A (DENNIS POTT CYRUS) 17 July 1962 (1962-07-17) column 3, line 25 - line 31 column 3, line 58 - line 65 ---	1,6,7
X	GB 1 339 659 A (ORLOVSKY NII LEGKOGO MASH) 5 December 1973 (1973-12-05) page 3, line 113 -page 4, line 9 ---	1-4,6,7, 9
X	GB 348 272 A (GEORGE GIBSON THORPE;MELLOWES & COMPANY LTD) 14 May 1931 (1931-05-14) page 4, line 26 - line 40; figure 6 ---	1-3,6-8
X	US 4 040 384 A (LATTNER ELMER A) 9 August 1977 (1977-08-09) column 3, line 34 - line 59 ---	1,6,7
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search:

6 December 2001

Date of mailing of the international search report

18/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Juguet, J

## INTERNATIONAL SEARCH REPORT

Int ional Application No

PCT/EP 01/09106

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 1 596 771 A (BARBEY) 22 June 1970 (1970-06-22) page 3, line 6 - line 9 -----	1,7
A	US 3 561 103 A (DENT BERNARD K) 9 February 1971 (1971-02-09) column 3, line 72 -column 4, line 4 -----	1,7

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/09106

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3044442	A	17-07-1962	GB 845936 A	24-08-1960
			FR 1221205 A	31-05-1960
			NL 236660 A	
GB 1339659	A	05-12-1973	NONE	
GB 348272	A	14-05-1931	NONE	
US 4040384	A	09-08-1977	NONE	
FR 1596771	A	22-06-1970	NONE	
US 3561103	A	09-02-1971	NONE	



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**